



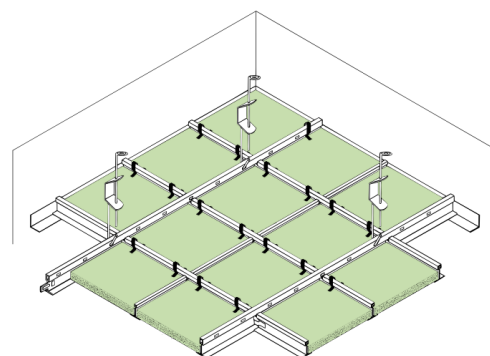

Degofon Fiberglass Ceiling Tiles

NRC 0.65
CAC 33

InnoQuiet Degofon Fiberglass Ceiling tiles have high density rockwool as the ingredient. This is premium product line with superior acoustic performance creating a quiet environment. InnoQuiet Degofon Fiberglass ceiling tiles are completely sealed on all sides edges and provide superior noise reduction and sound absorption. Their surface is smooth, even and maintains a high Fire Resistance Class (A2).

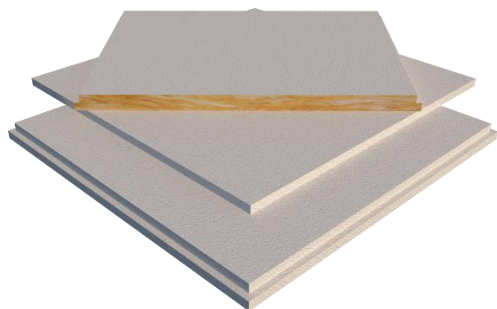

FEATURES & BENEFITS

- High sound absorption (NRC = 0.65)
- High fire performance (A2)
- Withstand 99% RH (relative humidity) and maintain dimensional stability, no more sagging.
- Stone wool provides no sustenance to microorganisms
- Optimal design freedom thanks to a large selection of edges (lay-in, tegular, concealed)
- Available in an array of sizes and formats, including planks.

USES

- Office
- Hotel
- Education
- Retail
- Restaurant
- Cinema
- Gym or Sport hall
- Night Club
- Car Showroom.

IMPORTER / DISTRIBUTOR

VK Asia Company Limited









R1-2208 Sunshine Riverside Building, Phu Thuong ward, Tay Ho district, Ha Noi, Vietnam | Phone: 098 132 0674

Email: sales@vkasia.vn | vkasiaco@gmail.com

Products made by Jianguyin Dego Building Materials Co., Ltd in China

STANDARD/ CERTIFICATE

- EN 13501-1
- EN 13964
- EN ISO 11654

Edge	NRC	Size (mm)	Thickness (mm)	Weight (kg/m ²)	Grid System
Square					
	0.65	600mm x 600mm	15	2.25	
		600mm x 1200mm	15	2.25	
Tegular					
	0.65	600mm x 600mm	20	3.2	
		600mm x 1200mm	20	3.2	
Conceal					
	0.65	600mm x 600mm	25	4.5	
		600mm x 1200mm	25	4.5	
Conceal					
	0.65	600mm x 600mm	40	7.0	 Stick on


Color range:

Smooth White




LR 83%

Elegant White

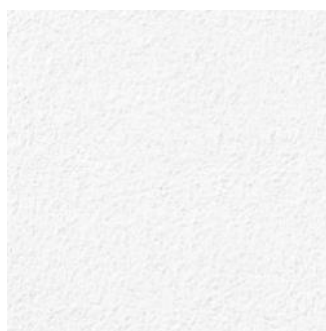

LR 82%

Light Grey

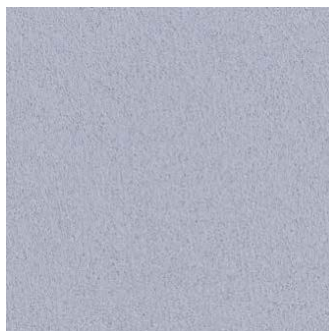

LR 8%

Black Grey



LR 4%

Physical Data:

Materials:

- Fiberglass panels
- Mineral wool 72%

Density: 100kg/m³

Color: Optional

Recoverable: 71%

Fire Class (ASTM E1264):

- All are Class A2
- Flame spread: 25 or less
- Smoke Developed: 50 or less

Sound Absorption:

- NRC 0.65
- CAC 33

Maintainance:

- Wipe with a soft cloth or vacuum with brush attachment.
- Cleanable with mild detergent.

Mildew resistance:

- Resistant to the growth of mold and mildew.
- Asbestos-free

Moisture Resistance:

RH99