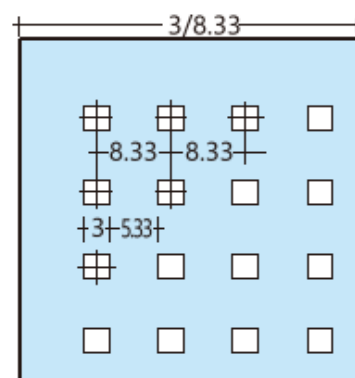
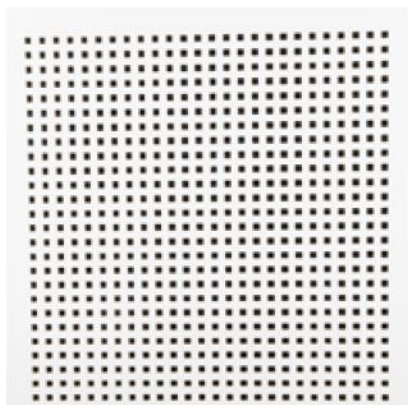




## M600 Degoton Perforated Gypsum Ceiling Tile

**NRC 0.65**

InnoQuiet Degoton M600 Perforated Gypsum Ceiling Tile is a perforated gypsum tile used for suspended ceilings with a square hole dimension of 3x3mm. The center distance between square holes is 8.33mm. The surface and edges are painted with white acrylic paint, the back of the panel is covered with a layer of fabric to enhance acoustic properties.



### FEATURES & BENEFITS

- High sound absorption (NRC 0.65 – 0.70 based on suspended distance)
- High fire performance (A2)
- Resistant to the growth of mold and mildew.
- Class A2 fire proof performance
- Withstand 70% RH (relative humidity).
- Easy to clean and maintain

### USES

- Office
- Hotel
- Education
- Retail
- Restaurant
- Cinema
- Gym or Sport hall
- Night Club
- Car Showroom.

### IMPORTER / DISTRIBUTOR

#### VK Asia Company Limited

R1-2208 Sunshine Riverside Building, Phu Thuong ward, Tay Ho district, Ha Noi, Vietnam | Phone: 098 132 0674







Email: [sales@vkasia.vn](mailto:sales@vkasia.vn) | [vkasiaco@gmail.com](mailto:vkasiaco@gmail.com)

Products made by Jiangyin Dego Building Materials Co., Ltd in China

### STANDARD/ CERTIFICATE

- EN 13501-1
- EN 13964
- EN ISO 11654

## Suspended System

Edge	NRC	Perforated Area (%)	Size (mm)	Thickness (mm)	Weight (kg/m <sup>2</sup> )	Grid System
Square						
	0.65	9%	595 x 595 / 1195	9.5	7	 A24
Regular / Square						
 	0.65	9%	595 x 595 / 1195	12.5	8.8	 E15  A24

## Physical Data:

**Materials:**

- High density gypsum boards.

Color: White

LR: 83%

Recoverable: 71%

**Fire Performance:**

- All are Class A2
- Lame spread: 25 or less
- Smoke Developed: 50 or less

**Sound Absorption:**

- NRC 0.65

**Maintainance:**

- Wipe with a soft cloth or vacuum with brush attachment.
- Cleanable with mild detergent.

**Mildew resistance:**

- Resistant to the growth of mold and mildew.
- Asbestos-free

**Moisture Resistance:** RH70