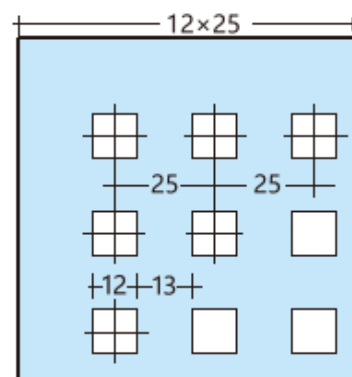
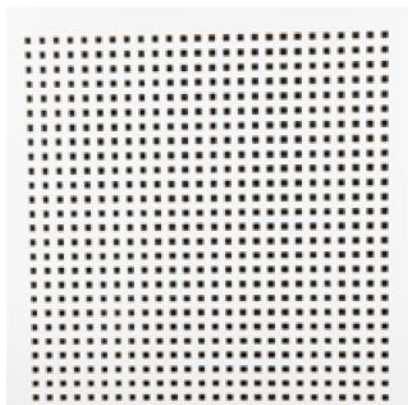




Q600 Degoton Perforated Gypsum Ceiling Tile

NRC 0.65

InnoQuiet Degoton Q600 Perforated Gypsum Ceiling Tile is a perforated gypsum tile used for suspended ceilings with a square hole diameter of 12x12mm. The center distance between square holes is 25mm. The surface and edges are painted with white acrylic paint, the back of the panel is covered with a layer of fabric to enhance acoustic properties.



FEATURES & BENEFITS

- High sound absorption (NRC 0.65 – 0.70 based on suspended distance)
- High fire performance (A2)
- Resistant to the growth of mold and mildew.
- Class A2 fire proof performance
- Withstand 70% RH (relative humidity).
- Easy to clean and maintain

USES

- Office
- Hotel
- Education
- Retail
- Restaurant
- Cinema
- Gym or Sport hall
- Night Club
- Car Showroom.

IMPORTER / DISTRIBUTOR

VK Asia Company Limited

R1-2208 Sunshine Riverside Building, Phu Thuong ward, Tay Ho district, Ha Noi, Vietnam | Phone: 098 132 0674







Email: sales@vkasia.vn | vkasiaco@gmail.com

Products made by Jiangyin Dego Building Materials Co., Ltd in China

STANDARD/ CERTIFICATE

- EN 13501-1
- EN 13964
- EN ISO 11654

Suspended System

| Edge | NRC | Perforated Area (%) | Size (mm) | Thickness (mm) | Weight (kg/m ²) | Grid System |
|--|------|---------------------|------------------|----------------|-----------------------------|--|
| Square | | | | | | |
|  | 0.65 | 18% | 595 x 595 / 1195 | 9.5 | 7 |  A24 |
| Regular / Square | | | | | | |
|   | 0.65 | 18% | 595 x 595 / 1195 | 12.5 | 8.8 |  E15  A24 |

Physical Data:

Materials:

- High density gypsum boards.

Color: White

LR: 83%

Recoverable: 71%

Fire Performance:

- All are Class A2
- Lame spread: 25 or less
- Smoke Developed: 50 or less

Sound Absorption:

- NRC 0.65

Maintainance:

- Wipe with a soft cloth or vacuum with brush attachment.
- Cleanable with mild detergent.

Mildew resistance:

- Resistant to the growth of mold and mildew.
- Asbestos-free

Moisture Resistance: RH70