



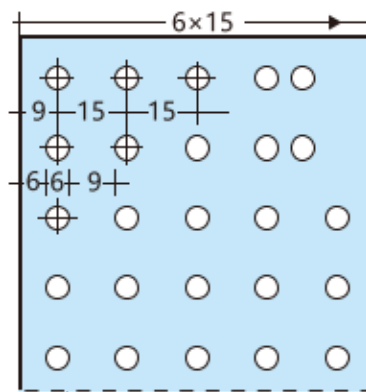

R600 Degoton Perforated Gypsum Ceiling Tile

NRC 0.65

InnoQuiet Degoton R600 Perforated Gypsum Ceiling Tile is a perforated gypsum tile used for suspended ceilings with a hole diameter of 6mm. The center distance between holes is 15mm. The surface and edges are painted with white acrylic paint, the back of the panel is covered with a layer of fabric to enhance acoustic properties.

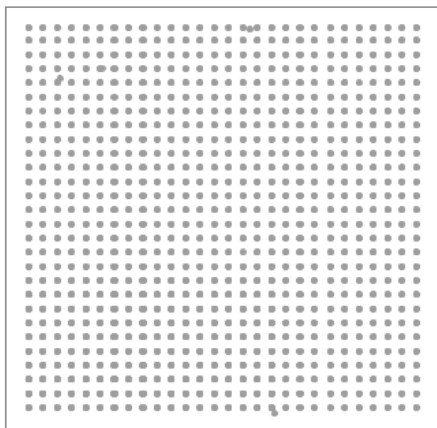







FEATURES & BENEFITS
<ul style="list-style-type: none"> High sound absorption (NRC 0.65 – 0.70 based on suspended distance) High fire performance (A2) Resistant to the growth of mold and mildew. Class A2 fire proof performance Withstand 70% RH (relative humidity). Easy to clean and maintain

USES
<ul style="list-style-type: none"> Office Hotel Education Retail Restaurant Cinema Gym or Sport hall Night Club Car Showroom.

IMPORTER / DISTRIBUTOR
<p>VK Asia Company Limited R1-2208 Sunshine Riverside Building, Phu Thuong ward, Tay Ho district, Ha Noi, Vietnam Phone: 098 132 0674 Email: sales@vkasia.vn vkasiaco@gmail.com Products made by Jiangyin Dego Building Materials Co., Ltd in China</p>

STANDARD/ CERTIFICATE
<ul style="list-style-type: none"> EN 13501-1 EN 13964 EN ISO 11654

Suspended System

Edge	NRC	Perforated Area (%)	Size (mm)	Thickness (mm)	Weight (kg/m ²)	Grid System
Square						
	0.65	12%	595 x 595 / 1195	9.5	7	 A24
Regular / Square						
 	0.65	12%	595 x 595 / 1195	12.5	8.8	 E15  A24

Physical Data:

Materials:

- High density gypsum boards.
- Mineral wool 72%

Color: White

LR: 83%

Recoverable: 71%

Fire Performance:

- All are Class A2
- Flame spread: 25 or less
- Smoke Developed: 50 or less

Sound Absorption:

- NRC 0.65

Maintainance:

- Wipe with a soft cloth or vacuum with brush attachment.
- Cleanable with mild detergent.

Mildew resistance:

- Resistant to the growth of mold and mildew.
- Asbestos-free

Moisture Resistance: RH70