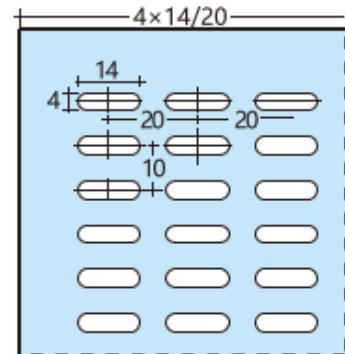
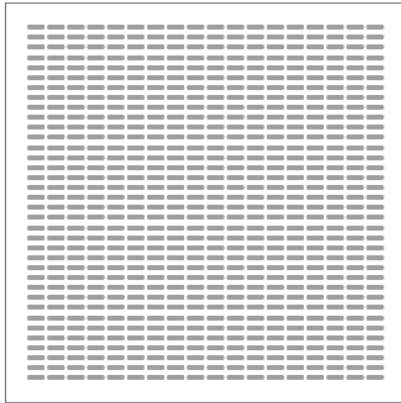




U600 Degoton Perforated Gypsum Ceiling Tile

NRC 0.65

InnoQuiet Degoton U600 Perforated Gypsum Ceiling Tile is a perforated gypsum tile used for suspended ceilings with a oval hole dimension of 4x14mm. The center horizontal / vertical distance between oval holes is 20mm/ 10mm. The surface and edges are painted with white acrylic paint, the back of the panel is covered with a layer of fabric to enhance acoustic properties.



FEATURES & BENEFITS

- High sound absorption (NRC 0.65 – 0.70 based on suspended distance)
- High fire performance (A2)
- Resistant to the growth of mold and mildew.
- Class A2 fire proof performance
- Withstand 70% RH (relative humidity).
- Easy to clean and maintain

USES

- Office
- Hotel
- Education
- Retail
- Restaurant
- Cinema
- Gym or Sport hall
- Night Club
- Car Showroom.

IMPORTER / DISTRIBUTOR

VK Asia Company Limited

R1-2208 Sunshine Riverside Building, Phu Thuong ward, Tay Ho district, Ha Noi, Vietnam | Phone: 098 132 0674







Email: sales@vkasia.vn | vkasiaco@gmail.com

Products made by Jiangyin Dego Building Materials Co., Ltd in China

STANDARD/ CERTIFICATE

- EN 13501-1
- EN 13964
- EN ISO 11654

Suspended System

Edge	NRC	Perforated Area (%)	Size (mm)	Thickness (mm)	Weight (kg/m ²)	Grid System
Square						
	0.65	12%	595 x 595 / 1195	9.5	7	 A24
Regular / Square						
 	0.65	12%	595 x 595 / 1195	12.5	8.8	 E15  A24

Physical Data:

Materials:

- High density gypsum boards.

Color: White

LR: 83%

Recoverable: 71%

Fire Performance:

- All are Class A2
- Lame spread: 25 or less
- Smoke Developed: 50 or less

Sound Absorption:

- NRC 0.65

Maintainance:

- Wipe with a soft cloth or vacuum with brush attachment.
- Cleanable with mild detergent.

Mildew resistance:

- Resistant to the growth of mold and mildew.
- Asbestos-free

Moisture Resistance: RH70