




FG DegoSilent Plus+

NRC 0.75

The InnoQuiet FG DegoSilent Plus+ seamless acoustical ceiling system made from a core of Fiberglass Acoustic ceiling panels and surface finished by DegoSilent Plus+ acoustic plaster. The system provides excellent acoustic performance and are ideal acoustic solution for hotel lobbies, meeting rooms, restaurants, theaters...

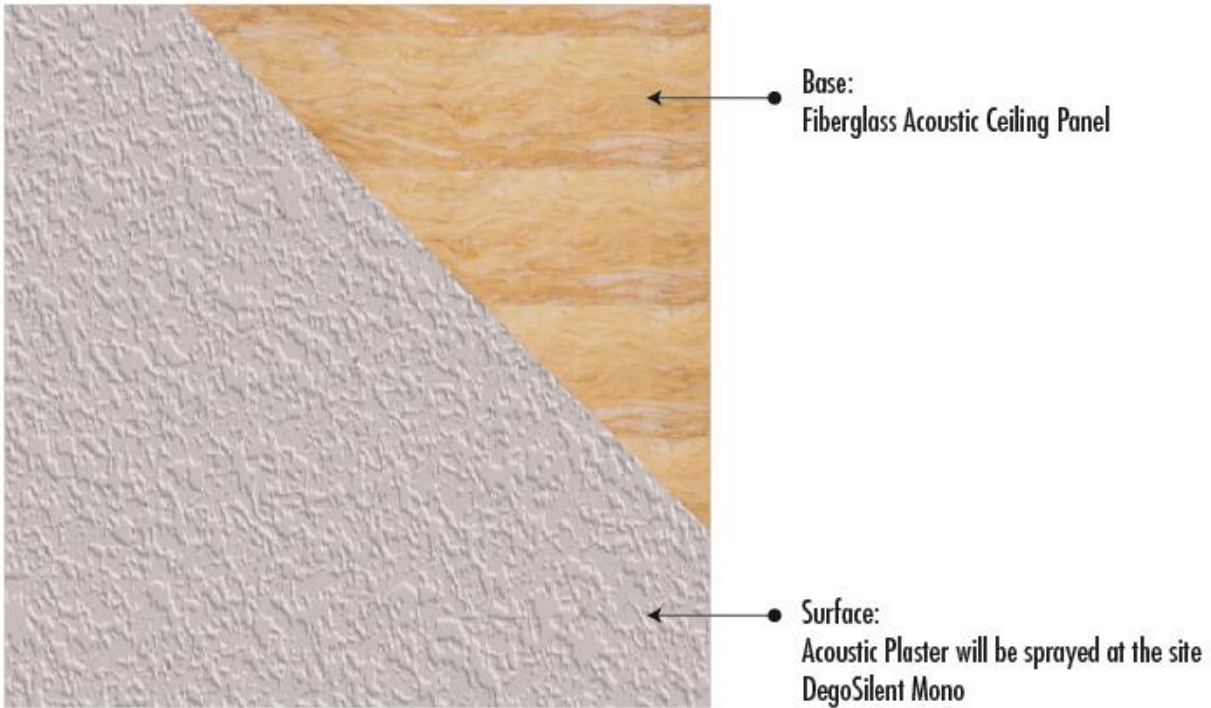

FEATURES & BENEFITS

- Acoustically plaster finished, monolithic appearance with fine texture
- Acoustically spray-applied finished
- High sound absorption (NRC0.75 | CAC 44)
- Fireproof performance (A2_S1d0)
- Resistant to the growth of mold and mildew.
- RH99 (relative humidity).
- Easy to clean and maintain

USES

- Reception areas
- Lobbies
- Meeting Rooms
- Restaurant dining areas
- Gym or Sport hall
- Libraries/ Retails
- Classrooms/ higher education

IMPORTER / DISTRIBUTOR

VK Asia Company Limited

R1-2208 Sunshine Riverside Building, Phu Thuong ward, Tay Ho district, Ha Noi, Vietnam | Phone: 098 132 0674

Email: sales@vkasia.vn | vkasiaco@gmail.com

Products were made in China and imported/ distributed by VK Asia Company Limited.

PRODUCT DESCRIPTION


- Core material: Fiberglass Ceiling Panel
- Surface: DegoSilent Mono / Plus Acoustic Plaster (Spray)
- Sizes: 1200x1200mm; 2400X1200mm
- Thickness: 25mm-40mm | Color: White | Edge: Square
- Density: 110kg/m³

PRODUCT PERFORMANCE


Thickness	Size(mm)	NRC	LR	Fireproof Class	Recycle content
25mm	1200x1200	0.75	83%	A2_s1d0	77%
	1200x2400				
30mm	1200x1200	0.85	83%	A2_s1d0	77%
	1200x2400				
40mm	1200x1200	0.9	83%	A2_s1d0	77%
	1200x2400				

SURFACE SELECTION


Smooth White

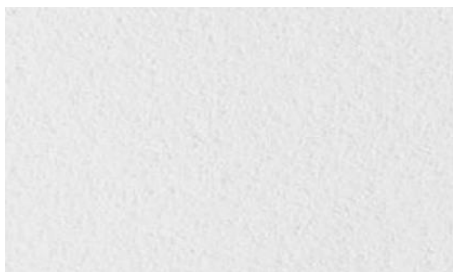

Medium White

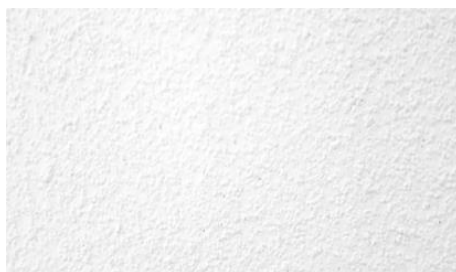


Particle White

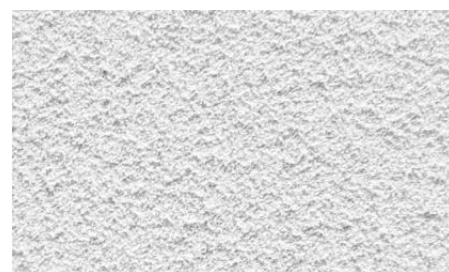


INSTALLATION TYLE

Type 1




Using accessories and glue to install directly to Concrete

Type 2



Using metal suspension grid, light steel keel with Gypsum board and special washers screws



Type 3

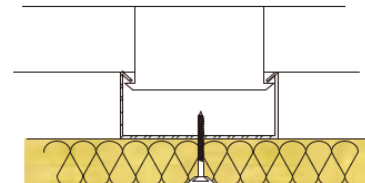

To install directly to metal suspension grid, light steel keel by special washers screws

SYSTEM COMPONENT



TYPE 1:

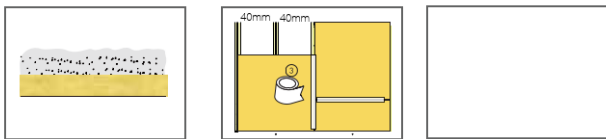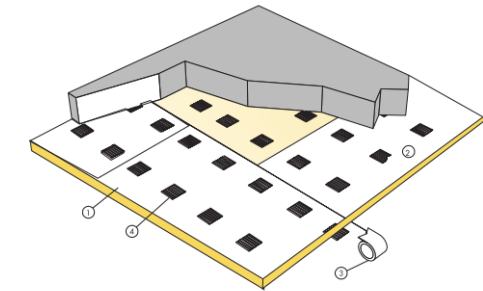

Materials

1. Fiberglass Acoustic Panel: 1m² / 1m²
2. Acoustic Plaster: DegoSilent Mono / Plus+: 3kg/ m²
3. Fiberglass Self-adhesion tape: 1.5m/ m²
4. PU Adhesive to install Acoustic panels to concrete



TYPE 2

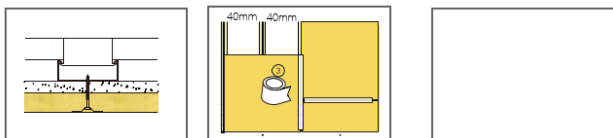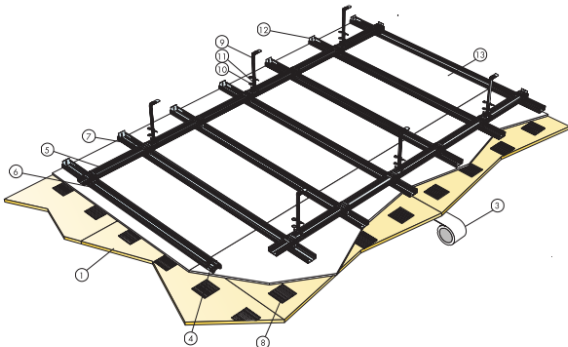

Materials

1. Fiberglass Acoustic Panel: 1m² / 1m²
2. Acoustic Plaster: DegoSilent Mono / Plus: 3kg/ m²
3. Fiberglass Self-adhesion tape: 1.5m/ m²
4. Main channel, 1200mm OC: 0.8m²/m²
5. Furring Channel, 400mm OC: 3m/1m²
6. Gypsum board: 1m²/ 1m²
7. PU Adhesive: 1.2kg/m²
8. Connect Nonius Hanger Upper, 800mm OC
9. Connect Nonius Hanger Lower, 800mm OC
10. Wall Angle
11. Special Washer: 11pcs/ m²

TYPE 3

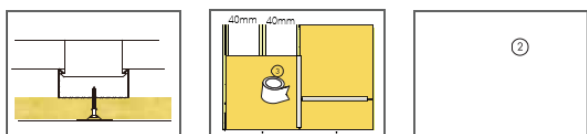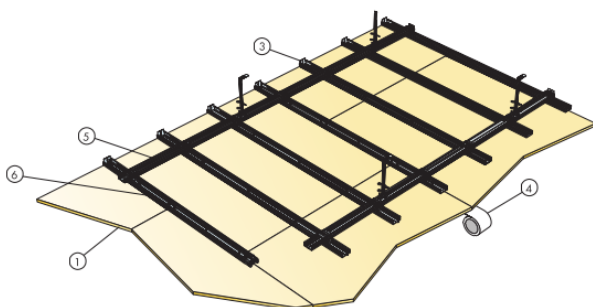

Materials

1. Fiberglass Acoustic Panel: 1m² / 1m²
2. Acoustic Plaster: Mono / Plus +: 3kg/ m²
3. Fiberglass Self-adhesion tape: 1.5m/ m²
4. Main channel, 1200mm OC: 0.8m²/m²
5. Furring Channel, 400mm OC: 3m/1m²
6. Special Washer: 11pcs/ m²